


## MÂTS CONIQUES - KONIC®

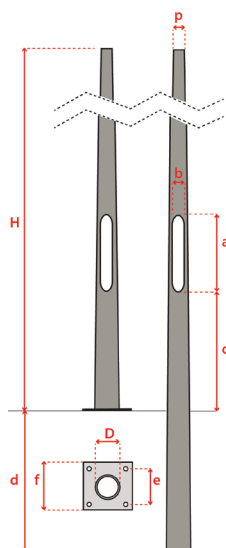

| matière*            |                       |                     |            |               | verre / polyester |            |                     |                       |                |          |              |
|---------------------|-----------------------|---------------------|------------|---------------|-------------------|------------|---------------------|-----------------------|----------------|----------|--------------|
| coloris*            |                       |                     |            |               | gris - noir       |            |                     |                       |                |          |              |
| H (m)               | Ø de la pointe p (mm) | Ø de la base D (mm) | a x b (mm) | c (mm)        | d (mm)            | e x f (mm) | poids mât seul (kg) | Ø tiges de scellement | Réf.           |          |              |
| 3 000               | 60                    | 110                 | 320 x 70   | 500           | 600               | 200 x 270  | 6                   | M16 L300              | CO110/60-3.0   |          |              |
| 3 600               |                       | 120                 |            |               |                   |            | 6,5                 | M16 L300              | CO120/60-3.6   |          |              |
| 4 000               |                       | 127                 |            |               |                   |            | 8                   | M16 L300              | CO127/60-4.0   |          |              |
| 4 600               |                       | 135                 |            |               |                   |            | 9                   | M16 L300              | CO135/60-4.6   |          |              |
| 5 000               |                       | 145                 |            |               |                   |            | 10                  | M16 L300              | CO145/60-5.0   |          |              |
| 5 600               |                       | 155                 |            |               |                   |            | 11                  | M16 L300              | CO155/60-5.6   |          |              |
| 4 000               | 76                    | 143                 |            |               | 320 x 70          | 500        | 800                 | 300 x 400             | 10             | M16 L300 | CO143/76-4.0 |
| 4 800               |                       | 155                 |            |               |                   |            |                     |                       | 11             | M16 L300 | CO155/76-4.8 |
| 5 000               |                       | 160                 |            |               |                   |            |                     |                       | 17             | M16 L300 | CO160/76-5.0 |
| 5 800               |                       | 170                 |            |               |                   |            |                     |                       | 18             | M18 L400 | CO170/76-5.8 |
| 6 000               |                       | 177                 |            |               |                   |            | 20                  | M18 L400              | CO177/76-6.0   |          |              |
| 6 800               |                       | 190                 |            |               |                   |            | 22                  | M18 L400              | CO190/76-6.8   |          |              |
| 7 000               |                       | 194                 |            |               |                   |            | 25                  | M18 L400              | CO194/76-7.0   |          |              |
| 8 000               |                       | 210                 |            |               |                   |            | 38                  | M18 L400              | CO210/76-8.0   |          |              |
| 9 000               |                       | 225                 |            |               |                   |            | -                   | -                     | CO225/76-9.0   |          |              |
| 10 000              |                       | 245                 |            |               |                   |            | -                   | -                     | CO245/76-10.0  |          |              |
| 11 000              |                       | 260                 |            |               |                   |            | -                   | -                     | CO260/76-11.0  |          |              |
| 11 600              |                       | 270                 |            |               |                   |            | -                   | -                     | CO270/76-11.6  |          |              |
| 12 000              |                       | 278                 |            |               |                   |            | -                   | -                     | CO278/76-12.0  |          |              |
| 12 600              |                       | 290                 |            |               |                   |            | -                   | -                     | CO290/76-12.6  |          |              |
| 13 000              | 295                   | -                   | -          | CO295/76-13.0 |                   |            |                     |                       |                |          |              |
| 13 600              | 305                   | -                   | -          | CO305/76-13.6 |                   |            |                     |                       |                |          |              |
| <b>MÂTS TÉLÉCOM</b> |                       |                     |            |               |                   |            |                     |                       |                |          |              |
| 8 000               | 115                   | 250                 | -          | -             | 1 250             | -          | 41                  | -                     | MT250/115-8.0  |          |              |
| 9 000               | 120                   | 270                 | -          | -             | 1 400             | -          | 61                  | -                     | MT270/120-9.0  |          |              |
| 10 000              | 120                   | 288                 | -          | -             | 1 500             | -          | 65                  | -                     | MT288/120-10.0 |          |              |
| 11 000              | 120                   | 304                 | -          | -             | 1 650             | -          | 75                  | -                     | MT304/120-11.0 |          |              |